

Redefining Packaging Hot Melt Adhesives



Clearly Superior

Superb bonding performance, trouble-free running are the mainstay of TECBOND's packaging adhesives line. Available in six formulas to meet your needs, Tecbond has a hot melt solution that's right for your process.



Benefits

- > Superb bonding performance
- Trouble-free running (Consistent long term clean running)
- Lower operating costs (Replaces several adhesives, less scrap, and lower cost)




Our Clear Formulas

Competitors Formula

Clear Advantage


The pearl white color of TECBOND Adhesives remains lighter than a leading competitor when subjected to a temperature of 320°F for 21 days. Better at day seven than the competitor after day one!

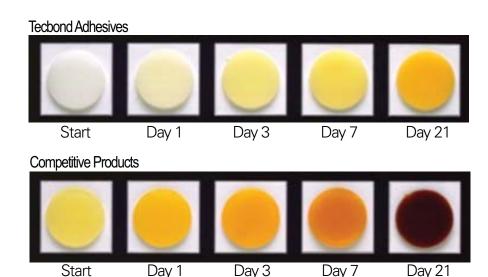

Viscosity

Our viscosity remains stable – even when sitting in the tank for several days!

- No dripping from nozzles
- · Consistent application quality
- · Reduced stringing and splashing

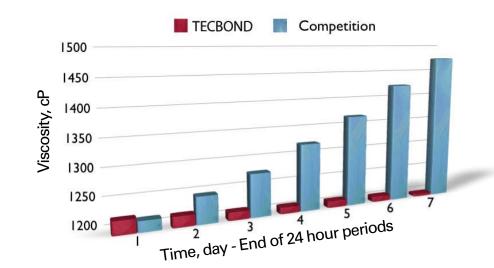

Formulas

Six formulas to meet your process needs:

TECBOND 7731F/BK

- > The 1st choice for case and carton sealing
- > Suitable for 85% of all packaging applications

TECBOND 5931F/BK

- > Deep freeze
- > Flexible down to -40°F

TECBOND 7931F/BK

- > Sift proof
- Low viscosity, fast setting hot melt for very high speed case and carton sealing, including sift proof

TECBOND 1141F/BK

- > High adhesion for difficult boards
- Formulated to bond some of the most difficult low surface energy materials

TECBOND 4191F/BK

- > Fast setting
- > High molten tack hot melt for fruit and vegetable boxes, fish and poultry packing

TECBOND 4991F/BK

- > Versatile, low application temperature adhesive
- > Reduced energy consumption and risk of burns